



**ATTENTION INSTALLERS:**

**THIS PALMER WASHSTAND WAS FABRICATED LARGER THAN REQUIRED FOR ITS INTENDED CHINA/PORCELAIN SINK AND MUST BE CUT ON SITE.**

**THE LENGTHS OF THE HORIZONTAL COMPONENTS MUST BE ADJUSTED TO PROPERLY POSITION THE TOPS OF THE LEGS TO THE APPROPRIATE LOCATIONS ON THE UNDERSIDE OF THE SINK TOP.**

**PLEASE SEE THE OTHER SIDE OF THIS PAGE FOR FIELD CUTTING DIRECTIONS.**


**FOR FURTHER TECHNICAL SUPPORT PLEASE CALL PALMER INDUSTRIES AT 1-401-421-1730**

# Field Cutting to Size



LEG SYSTEM ASSEMBLY

INSTALLATION INSTRUCTIONS

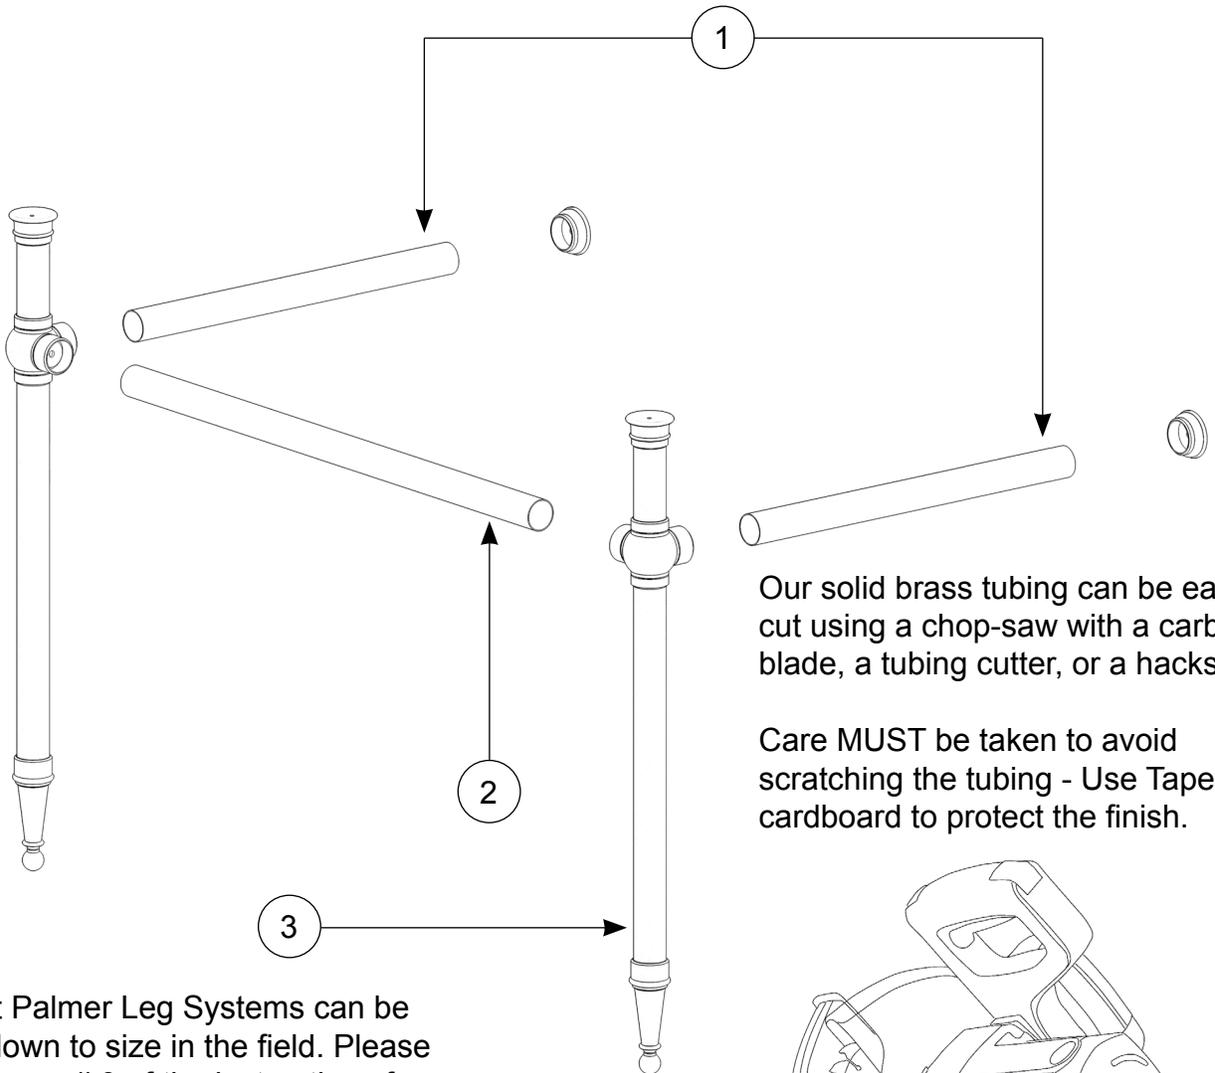


Our solid brass tubing can be easily cut using a chop-saw with a carbide blade, a tubing cutter, or a hacksaw.

Care **MUST** be taken to avoid scratching the tubing - Use Tape or cardboard to protect the finish.

Most Palmer Leg Systems can be cut down to size in the field. Please see page # 3 of the instructions for limitations.

1. To reduce depth, cut this end of horizontal Wall Returns and Shelf Supports.\*
2. To reduce width cut one end of the Horizontal Crossbar.\*\*
3. To reduce height see page #3 to determine which end of leg to cut.

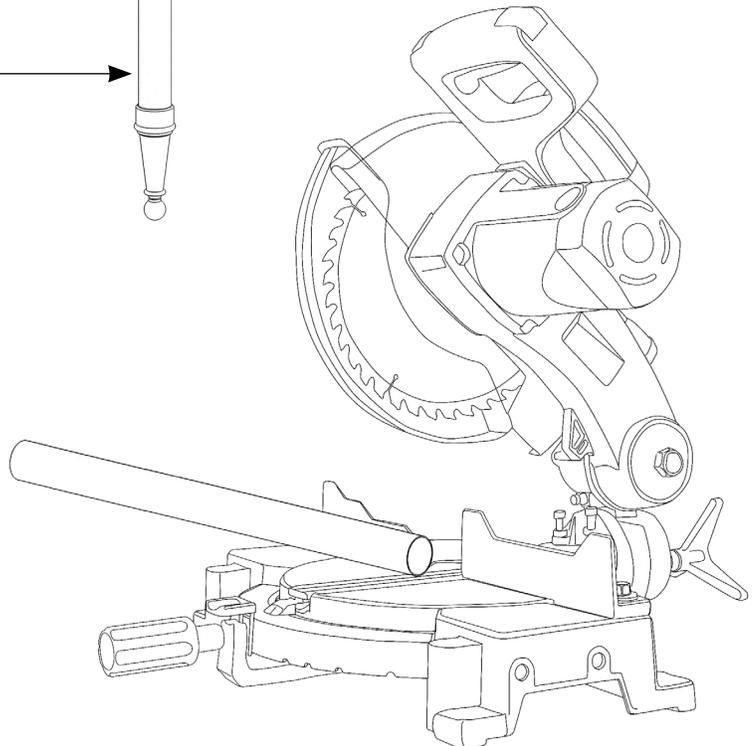

\* For Acrylic Wall Returns & Shelf Supports you **MUST** cut the wall end.  
\*\* Acrylic Horizontals may not be field cut.

rev: 031011